

# INDOOR OMNI ANTENNA

## 3dBi • 698 - 2700 MHz

**FIP1000**

### Product Features

- Wide bandwidth
- Easy indoor installation
- Suitable for iDEN, GSM and WCDMA cellular communication systems, and 2.4 GHz WLAN applications
- Low profile



Indoor Omni Antenna




### Applications


- Indoor coverage

Specification	Value
Frequency Range	698 - 2700 MHz
Gain	3 dBi
Vertical Beamwidth	60/35°
Horizontal Beamwidth	360°
VSWR	<1.8 / <1.5
Nominal Impedance	50 Ω
PIM	<140dBc @ 2x 33dBm
Polarization	Vertical
Max Power	50 W
Connector	N-Female
Dimension	Ø 6.7x 3.5 inches • Ø185 x 85 mm
Weight	0.88 lbs • 0.4 kg

Horizontal Pattern

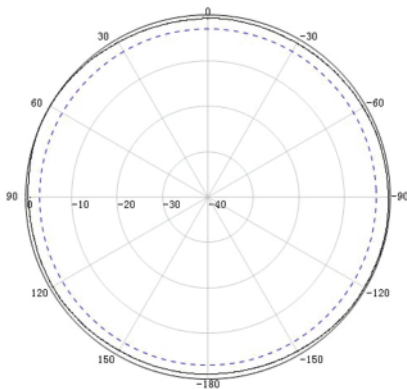

Vertical Pattern

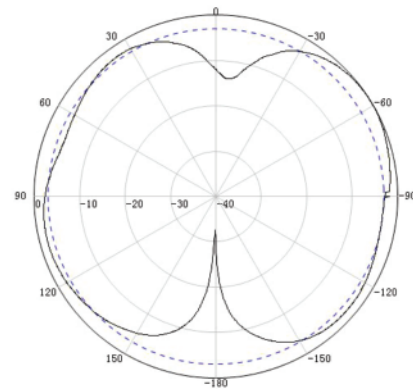

DOC AN016.04 - 27052015  
 Fiplex is a registered trademark of Fiplex Communications, Inc.  
 Fiplex Communications, Inc. reserves the right to change specifications without prior notice.