


# PUBLIC SAFETY BANDWIDTH ADJUSTABLE SIGNAL BOOSTERS

## PS 800 MHz • Class B

**HS24V**  
**HS30V**  
**HS37V**

### Product Features

- IF SAW filtering, sharp filtering, outstanding out of band rejection
- Band Selective, Bandwidth adjustable by software
- Uplink squelch, programmable
- Antenna isolation control
- User adjustable gain control, UL and DL independent
- Automatic Gain Control
- NFPA compliant
- Weatherproof enclosure, IP67/NEMA4X

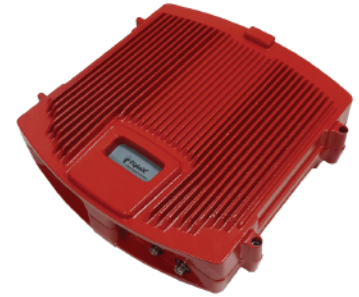

Public Safety Bandwidth Adjustable  
Signal Boosters

### Applications

- For P25, TETRA, DMR, NXDN and Conventional systems
- Buildings, tunnels, stadiums
- Passive DAS
- Leaky cable networks



### RF Specification

Type	Band Selective Signal Boosters, BW Adjustable		
Frequency range	806-824 / 851-869 MHz		
Passband BW	500 KHz to fullband, software adjustable		
Gain, maximum	HS24V: 70dB	HS30V: 80dB	HS37V: 80dB
Passband ripple	+/- 2.0 dB		
Gain, manual control	20dB range, digitally controlled in 1dB steps		
Antenna isolation control, gain adjustment	0 to 20 dB		
AGC range	0 to 40 dB		
Composite output power, DL	HS24V: +24dBm	HS30V: +30dBm	HS37V: +37dBm
Composite output power, UL	+24dBm		
IM generation	< -13dBm		
Noise figure, in dB	7.0 max at maximum output power		
Impedance	50 Ω		
Group delay	8uS max		
Connectors	N(f) as standard		
VSWR at operating frequencies	1.5:1 max		
Uplink squelch function	Yes, user selectable, to avoid UL noise when no carriers present		

DOC BD231.07 - 20092016  
 Fiplex is a registered trademark of Fiplex Communications, Inc.  
 Fiplex Communications, Inc. reserves the right to change specifications without prior notice.



www.fiplex.com • info@fiplex.com

# PUBLIC SAFETY BANDWIDTH ADJUSTABLE SIGNAL BOOSTERS

## PS 800 MHz • Class B

**HS24V**  
**HS30V**  
**HS37V**

### Supervising Specifications

### Value

Self diagnostic platform	Microprocessor based
Alarms	Yes, amplifiers status, power amplifiers status, power supply failure, temperature, AGC, RF overload, poor antenna isolation.
Local management and supervising	Local access via USB
Remote management and supervising	Remote access via Ethernet and wireless modem, option RC-G (FIPLEX OMS)
RoHS compliance	Yes

### Electrical Specifications

### Value

AC Supply	110/220 VAC 50/60 Hz
Power Consumption	HS24V: 40W      HS30V: 75W      HS37V:200W
DC Supply	See table
Housing	IP67 / NEMA4X
Temperature range	-22° to 140° F • -30° to +60° C
Dimension	HS24V y HS30V: 15.3 x 15.3 x 3.5 inches • 390 x 390 x 90 mm HS37V: 20.2 x 18.2 x 9 inches • 514 x 462 x 230mm
Weight	HS24V y HS30V: 39.7 lbs • 18 kg HS37V: 55 lbs • 25 kg
Mounting	Wall and pole mounting as standard.
MTBF	>50.000 hours

MODELO	NFPA	RC-G	110-220VAC	+24VDC	-48VDC
HS24V-005	X		X		
HS24V-006	X			X	
HS24V-007	X				X

MODELO	NFPA	RC-G	110-220VAC	+24VDC	-48VDC
HS30V-004	X		X		
HS30V-005	X			X	
HS30V-006	X				X

MODELO	NFPA	RC-G	110-220VAC	+24VDC	-48VDC
HS37V-004	X		X		
HS37V-005	X			X	
HS37V-006	X				X

DOC BD231.07 - 20092016  
 Fiplex is a registered trademark of Fiplex Communications, Inc.  
 Fiplex Communications, Inc. reserves the right to change specifications without prior notice.

WARNING: This is NOT a CONSUMER device. It is designed for installation by FCC LICENSEES and QUALIFIED INSTALLERS. You MUST have an FCC LICENSE or express consent of an FCC Licensee to operate this device. Unauthorized use may result in significant forfeiture penalties, including penalties in excess of \$100,000 for each continuing violation.