

# UHF DUAL SUB BAND COMBINER

## 450-512 MHz


**MBC45-2**

### Product Features

- To provide dual band BDA configuration in UHF
- Combiners all UL and all DL into the same connector
- Can be used for TO BASE or TO MOBILE



### Diagram

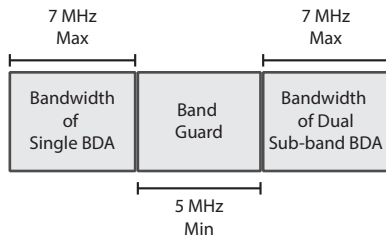

### Specifications

### Value

Frequency distribution	450 – 512 MHz
Insertion loss	2dB max
Pass BW	7 MHz + 7 MHz
Connectors	N(f)
Minimum frequency distribution	See diagram
Mounting	Brackets for 19in rack mount, 3RU
Dimension	19 x 5.2 x 10 inches • 483 x 133 x 254 mm
Temperature range	-22° to 140° F • -30° to +60° C

