


BROADBAND LOW POWER SPLITTERS / COMBINERS

50 - 960 MHz

DRS Series

Product Features

- Broadband passive devices designed in a Wilkinson configuration
- Balanced power distribution in the 50 to 960 Mhz range
- More than 15dB isolation between output ports
- 2, 4 and 8 output ports models available as standard, others available upon request

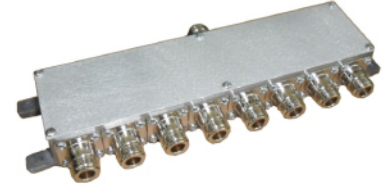

Broadband Low Power Splitter - DRS8-2



Specification	DRS2-2	DRS4-2	DRS8-2
Frequency band	50 - 960 MHz	50 - 960 MHz	50 - 960 MHz
Number of Inputs	1	1	1
Number of outputs	2	4	8
Insertion loss, typ	3,5dB +/- 1 dB	7dB +/- 1.5 dB	10dB +/- 2.5 dB
VSWR all ports	<1.5:1	<1.5:1	<1.5:1
Isolation between output ports,	>15dB	>15dB	>15dB
Power input at Input port	+30dBm Max	+30dBm Max	+30dBm Max
Temperature range	-4° to 140° F -20° to +60° C	-4° to 140° F -20° to +60° C	-4° to 140° F -20° to +60° C
Connectors	N(f)	N(f)	N(f)
Dimension	3.5 x 1.6 x 5.1 inches 88 x 32 x 130 mm	3.5 x 3.3 x 9.4 inches 88 x 83 x 240 mm	3.5 x 3.3 x 9.4 inches 88 x 83 x 240 mm
MTBF	>1,000,000 hours	>1,000,000 hours	>1,000,000 hours

DOC 5C102.01 - 12062015
 Fiplex is a registered trademark of Fiplex Communications, Inc.
 Fiplex Communications, Inc. reserves the right to change specifications without prior notice.