

# BROADBAND POWER SPLITTERS

## 70 - 960 MHz


DPS2L2

### Product Applications



- Indoor / Outdoor
- Broadband power splitting and combining

Specification	DPS2L2
Type	Broadband power splitters
Frequency range	70 – 960 MHz
Insertion loss	<0.9dB
Split Loss	3dB
Isolation	19dB (80-900) , 14dB (70-960)
VSWR	<1.5 : 1
Impedance	50Ω
IM Product	-130 dBc with 2 carriers @ 20W Min
Power	100W Max
Interface	N-Female
Temperature range	-13 to 167°F • -25 to +75°C
Humidity	0% to 100%
Environmental	IP65
MTBF	>1,000,000 hours

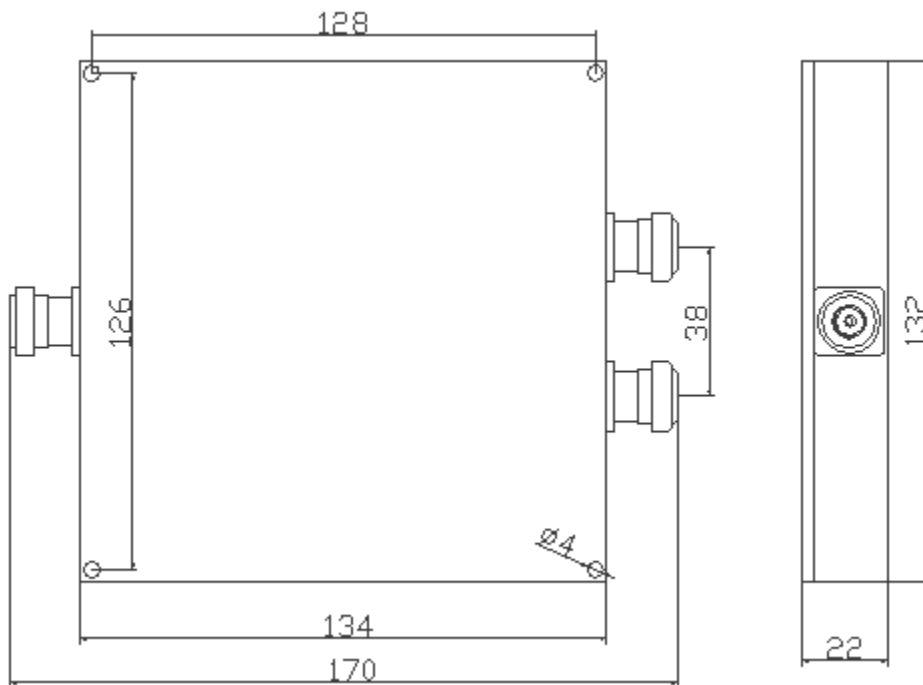

Product Drawing

DOC 5C126.01 - 22102015  
 Fiplex is a registered trademark of Fiplex Communications, Inc.  
 Fiplex Communications, Inc. reserves the right to change specifications without prior notice.