


UHF Low Band Centric DAS 406 - 439 MHz

HONBDA-xx-L2

Product Features

- Specifically designed for LMR and Public Safety Applications
- Redundancy features
- No need of “Front End BDA” or “POI”, reduced infrastructure cost
- Channelized
- Programmable uplink squelch (per channel and time slot) for reduced UL noise contribution
- Software programmable channel selective or band selective operation, suitable for highly congested RF environments
- Centralized operation, single point of access
- AGC per channel and time slot
- Supports Over The Air (OTA) operation
- Preserves the far end communications and protects BTS Rx sensitivity

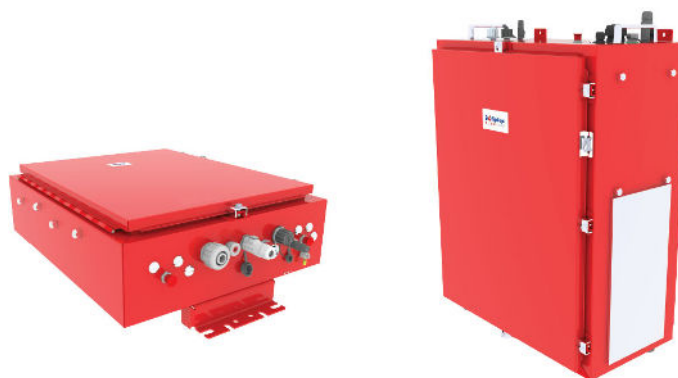

Applications

- For P25 Ph1, P25 Ph2, DMR, TETRA, TETRAPOL, C2000, NXDN and Conventional Systems
- Indoor: tunnels, buildings, subways, airports, among others
- Outdoor: stadiums, canyons, dense urban areas, remote rural towns

Specifications

Value

Fiber Optic	Single mode
WDM	Yes
Optical Wavelengths	1310 / 1550 nM
Operational Bands	406 - 439 MHz
Number of Channel Filters	64 channels + 4 Bandwidth Adjustable per band
Available Channel Filter BW	100kHz, 75kHz, 62.5kHz, 50kHz, 37.5kHz, 25kHz & 12.5kHz
Group Delay	Channel Selective 100 kHz, 14.3µS Channel Selective 75 kHz, 16.9µS Channel Selective 62.5 kHz, 18.8µS Channel Selective 50 kHz, 21.6µS Channel Selective 37.5 kHz, 26.3µS Channel Selective 25 kHz, 35.8µS Channel Selective 12.5 kHz, 63µS or Band selective: 3.5 to 6.5µS, depending on BWA
Supported Fiber Loss	20dB max
Optical Connectors	LC /APC compatible with LC/UPC
Optical Return Loss	>45dB
RF Input/Output Impedance	50Ω
RF Connectors	N(f)
Overall Gain (Master + Remote)	85 dB regardless fiber length
Noise Figure	<9 dB

Master Unit Electrical and Mechanical Specifications

Value

DL Manual Attenuator	20dB in 1dB steps
Maximum UL Output Power	+24 dBm
UL IM and Spurious Generation	< -13 dBm
UL Manual Attenuator	20dB in 1dB steps
Max Operational DL Input Power	-35dBm
Number of Optical Ports	8
Power Supply	110 VAC OR +24VDC
Power Consumption	80 W
Housing	NEMA 4
Temperature Range	-22° to +131° F • -30° to +55° C
Humidity	<95% non condensing
Dimensions	30in x 24in x 14in (762mm x 610mm x 335mm)
Weight	210lbs (95kgs)
MTBF	>50,000 hours

Remote Unit Electrical and Mechanical Specifications

Value

Composite Output Power, DL	+ 37 dBm
DL IMD and Spurious Generation	< -13dBc
Number of Optical Ports	1 for MU redundancy FO ports available as optional
UL Maximum Input Power	0dBm
UL Noise Reduction	UL squelch per channel, programmable
Manual Attenuator	20dB in 1 dB steps +/- 0.5 dB
Power Supply	110VAC OR +24VDC
Power Consumption	140 W
Housing	NEMA 4
Temperature Range	-22° to +131° F • -30° to +55° C
Humidity	< 95% non condensing
Dimension	30in x 24in x 14in (762mm x 610mm x 335mm)
Weight	185lbs (72kgs)
Dimension - High Power	34.17in x 24.94in x 18in (868.15mm x 633.6mm x 459.45mm)
Weight - High Power	187.3lbs (84kgs)
MTBF	> 50.000 hours

Control and Alarms

Value

Alarms report	Via Master Unit
	Local: USB (POWER STATUS, MU STATUS, RM STATUS)
Master Unit Configuration	Local: USB

UHF Low Band Centric DAS

406 - 439 MHz

HONBDA-xx-L2

MODEL	BAND	BW DUPLEXER	TYPE	POWER SUPPLY
HONBDA-DRMA-L2	UHF 406-439 MHz	NON DUPLEXED	MASTER	AC&DC
HONBDA-MA-L2NH	UHF 406-439 MHz	NON DUPLEXED	MASTER	AC
HONBDA-MA-L25H	UHF 406-439 MHz	5MHz BW	MASTER	AC
HONBDA-MA-L22H	UHF 406-439 MHz	2MHz BW	MASTER	AC
HONBDA-MD-L2NH	UHF 406-439 MHz	NON DUPLEXED	MASTER	DC
HONBDA-MD-L25H	UHF 406-439 MHz	5MHz BW	MASTER	DC
HONBDA-MD-L22H	UHF 406-439 MHz	2MHz BW	MASTER	DC
HONBDA-R1A-L2NH	UHF 406-439 MHz	NON DUPLEXED	REMOTE 1FO	AC
HONBDA-R1A-L25H	UHF 406-439 MHz	5MHz BW	REMOTE 1FO	AC
HONBDA-R1A-L22H	UHF 406-439 MHz	2MHz BW	REMOTE 1FO	AC
HONBDA-R1D-L2NH	UHF 406-439 MHz	NON DUPLEXED	REMOTE 1FO	DC
HONBDA-R1D-L25H	UHF 406-439 MHz	5MHz BW	REMOTE 1FO	DC
HONBDA-R1D-L22H	UHF 406-439 MHz	2MHz BW	REMOTE 1FO	DC
HONBDA-R2A-L2NH	UHF 406-439 MHz	NON DUPLEXED	REMOTE 2FO	AC
HONBDA-R2A-L25H	UHF 406-439 MHz	5MHz BW	REMOTE 2FO	AC
HONBDA-R2A-L22H	UHF 406-439 MHz	2MHz BW	REMOTE 2FO	AC
HONBDA-R2D-L2NH	UHF 406-439 MHz	NON DUPLEXED	REMOTE 2FO	DC
HONBDA-R2D-L25H	UHF 406-439 MHz	5MHz BW	REMOTE 2FO	DC
HONBDA-R2D-L22H	UHF 406-439 MHz	2MHz BW	REMOTE 2FO	DC

This document is not intended to be used for installation purposes.
 We try to keep our product information up-to-date and accurate.
 We cannot cover all specific applications or anticipate all requirements.
 All specifications are subject to change without notice.

Fiplex

2101 NW 79th Avenue
 Miami, FL 33122
 305 884-8991
 www.fiplex.com

Fiplex® is a registered trademark of Fiplex Communications, Inc.
 ©2023. All rights reserved. Unauthorized use of this document is strictly prohibited.

Country of Origin: USA

