

3dB HYBRID COUPLER

136 - 870 MHz


BDA-HC3-L2

Product Applications

- Low Frequency Band Covering VHF, UHF and Tetra Band
- Low VSWR
- High Directivity
- Indoor Using IP60
- Available with Type N, 7/16DIN or 4.3/10 male Connectors



Specification	Value
Coupling(dB)	3
Accuracy(dB)	±1.3
Isolation	> = 18
Freq	136-870MHz
VSWR	≤1.30
Power Rating(W)	200W (average Per Port)
Impedance	50 Ω
Connector	N-female
Color	Red-plated
Operating Temperature	-25°C to +75°C
Weight	1.05 kg
Dimensions(mm)	See drawing

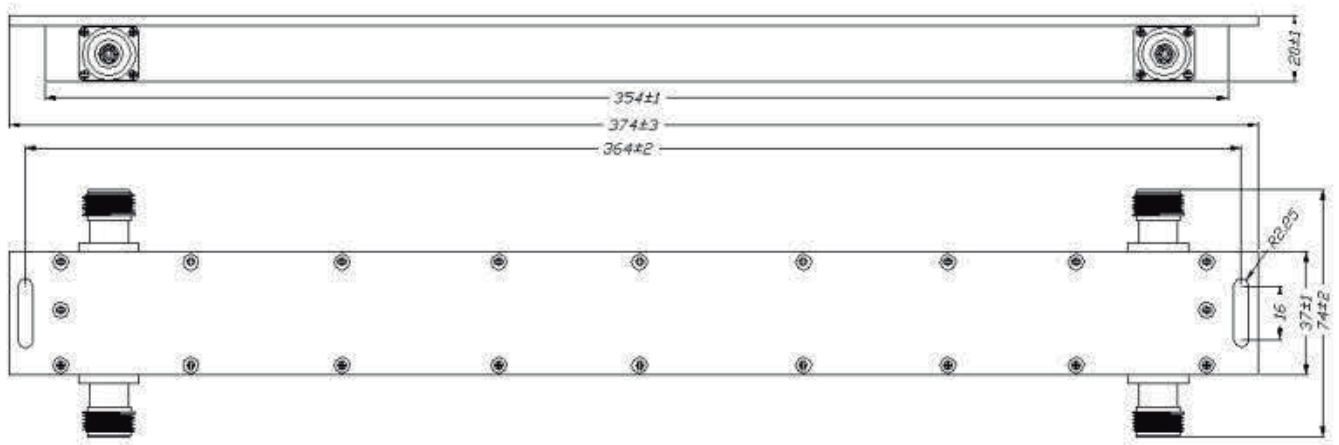

DOC HON-62075.00 - 05182020

Honeywell Business Solutions
 715 Peachtree Street NE
 Atlanta, GA 30308
 www.honeywell.com

HON-62075.00 • 05182020
 ©2020 by Honeywell International Inc. All rights reserved.
 Unauthorized use of this document is strictly prohibited.
 This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.
 Country of origin: U.S.A.

**THE
 FUTURE
 IS
 WHAT
 WE
 MAKE IT**

Honeywell